

KENWOOD VALVE CONTROLS (INDIA) PRIVATE LIMITED

003L Series Limit Switch Box With Engineered Resin enclosure For Gate, Globe Valves/Actuators & Cylinders


Product Information

Main Features:

- A.Engineered Resin enclosure is robust yet lightweight; allows broad operating temperatures.
- B.2No's of Conduit entries.
- C.Tool-free spring loaded quick cam adjustment.
- D.Prewired terminal strip.
- E.Optional terminal strip for Solenoid valve wiring.
- F.PCB for compactness.

CERTIFICATIONS:


- >> Dust and watertight Protection IP-67 as per IEC 60529
- >> CE certified
- >> SIL-3 Certified, Usable upto SIL level-3

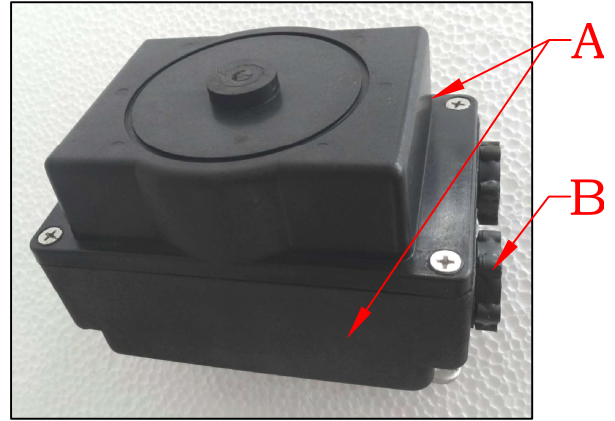

Model/part coding:

Position---1|2|3|4|5|6|7|8

1	Unit	007L= Series
2	Shaft type	A= Kenwood standard(Standard) B= Non-Namur shaft(custom built) C= Kenwood standard with torsion spring
3	No of cable entry & connections	A= 2 x 1/2" NPT B= 2 x PG13.5 C= 2 x M20x1.5 E= 2 x 3/4" ET F= 2 x 9pin connector(to suit 11 to 18mm Cable OD) G= 1 x 9pin connector(to suit 11 to 18mm cable OD)
4	Switch type	01= Honeywell V15T10EZ200A05 SPDT 24VDC 6A/ 110VDC 0.5A/ 250VAC 10A mechanical* 02= P&F NBB2-V3-E2 Proximity 3 wire PNP NO 10-30VDC* 05= P&F NBB3-V3-Z4 Proximity 2 wire NO 5-60 VDC* 06= P&F NBB3-V3-Z5 Proximity 2 wire NC 5-60 VDC* 07= P&F NBN4-12GM40-Z0 Proximity 2 wire NO 6-60 VDC(Preferred model for 24VDC-2wire)** 12= P&F NBN4-12GM50-E2 Proximity 3 wire PNP NO 10-30 VDC(Preferred model for 24VDC-3wire** 13= P&F NBN4-12GM50-E0 Proximity 3 wire NPN NO 10-30 VDC** 14= P&F NJ4-12GM50-WS Proximity 2 wire NO 20-253 VAC** 16= P&F NJ4-12GM-N Proximity 2 wire EEx ia certified NAMUR** 18= P&F NJ2-V3-N Proximity 2 wire EEx ia certified NAMUR* 20= P&F SJ3.5-N Proximity 2 wire EEx ia certified** 22= P&F NJ5-18GM-N Proximity 2 wire EEx ia certified NAMUR** 24= P&F NBB4-F1-US Proximity 2 wire NO-- 20-250 VAC/VDC* 25= IFM make IF-5719 Proximity 2 wire NO 10-30 VDC** 27= Jai Balaji microswitches model JMS-IRS 250VAC 10A mechanical* 28= P&F NBB2-12GM40-Z0 Proximity 2 wire NO 5-60 VDC** 29= P&F NBB5-18GM40-Z0 Proximity 2 wire NO 5-60 VDC** 30= Rochwell-872C-D3NE12-A2 Proximity 2 wire NO 10-30 VDC** 31= Omron-E2E-X3D1-N-2M Proximity 2 wire NO 10-30 VDC** 36= P&F NBB2-V3-US proximity 2 wire 10-140 VDC* 53= Honeywell V15S05CZ100A0501 SPDT 24VDC 0.2A/ 250VAC 5A Mechanical* *Max 4 Switches/Sensors possible **Max 2 Switches/Sensors possible
5	Switch Qty	1= 1No 2= 2No 3= 4No
6	Stroke	5=L5(from 50 upto 175mm) 10=L10(from 376 to 425mm) 15=L15(from 626 to 675mm) 6=L6(from 176 to 228mm) 11=L11(from 426 to 475mm) 16=L16(from 676 to 725mm) 7=L7(from 229 to 275mm) 12=L12(from 476 to 525mm) 17=L17(from 726 to 775mm) 8=L8(from 276 to 325mm) 13=L13(from 526 to 575mm) 9=L9(from 326 to 375mm) 14=L14(from 576 to 625mm)
7	Optional terminal strip for SV connection	1= Not required 2= Required(Not possible when switch Qty is 4no's)
8	Cable Entry Fittings	Nil= Both cable entries are fitted with plastic dust caps CP1= One fitted with Metal blind plug & another one fitted with plastic dust cap CP2= Both cable entries are fitted with Metal blind plug CG1= One fitted with Brass Nickel plated cable gland & another one fitted with plastic dust cap CG2= Both cable entries are fitted with Brass Nickel plated cable gland PACG1= One fitted with Polyamide cable gland & another one fitted with plastic dust cap PACG2= Both cable entries are fitted with Polyamide cable gland

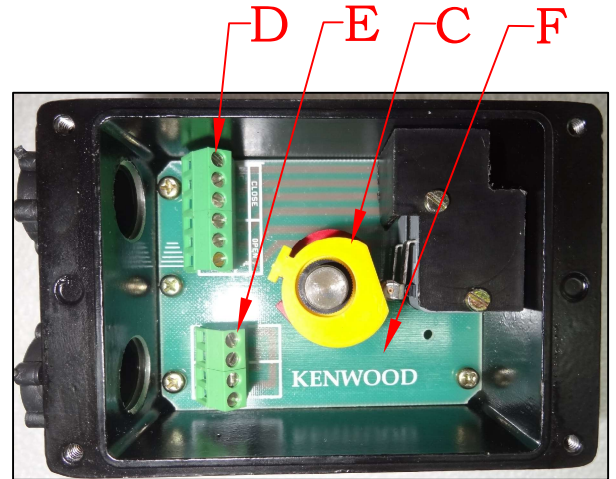

Example(Item coding/Ordering code)

003L[A][A]18|2|1|1| ---Linear limit switch box with Kenwood std Shaft,2no 1/2"NPT(F) cable entry, 2no P&F NJ2-V2-N sensors, with L2 lever(for valve stroke length up to 70mm), without optional SV terminals, with Engineered Resin enclosure, and both cable entries fitted with plastic dust caps.

Ref no : 003L/KGV/2022/11

Rev : 00

Page No: 01 of 02

Dimensions (mm)

For Drawing Contact Factory

Product design and specification may change without notice.

Drawing is not to scale

KENWOOD VALVE CONTROLS (INDIA) PRIVATE LIMITED

An ISO 9001 Certified Company

C-217, MT sagar Industrial Estate, Gokul Road, Hubli-580030(INDIA).

Telefax: +91-836-2232118/2333118

Mob: +91-9845539408

E-mail: preorders@kenwoodvalvecontrols.com

Website: www.kenwoodvalvecontrols.com

Ref no : 003L/KGV/2022/11

Rev : 00

Page No: 02 of 02